

Simulation of Fluid Movement in the Reservoir-Well Gas Lift System

Sh.A.Kerimova

Abstract. A hydrodynamic model of unsteady movement of oil and gas in the reservoir-well system is constructed and solutions to the system of differential equations are given. The obtained analytical formula makes it possible to determine the dynamics of pressure at the bottom of the well and the productivity of the formation, depending on the parameters of the system. Numerical calculations have been carried out for practical values of the reservoir-well system parameters.

Key Words and Phrases: reservoir-wells, Laplace transform, fluid movement, gas movement, continuity equation.

1. Introduction

Gas lifting of liquid from a well is widely used in oil production. The increase in the efficiency of the hoist is of great practical and scientific importance. Despite the fact that a lot of works are devoted to this problem, the issue of increasing the efficiency of gas lift taking into account the movement of fluid in the reservoir-well system is still poorly understood [1-6]. And the movement of fluid during oil production occurs in the reservoir-well system. Therefore, modeling and studying the movement of gas lift fluid in the reservoir-well system is of great practical and scientific importance.

2. Statement and solution of the problem.

Consider plane-radial filtration of a homogeneous fluid in a circular homogeneous reservoir. The differential equation of the piezoconductivity of a plane-radial fluid flow has the form [7,8]

$$\frac{1}{r} \frac{\partial}{\partial r} \left(\frac{\partial \Delta P}{\partial r} \right) = \frac{1}{\chi} \frac{\partial \Delta P}{\partial t} \quad r_c \leq r \leq R_k; \quad t > 0. \quad (2.1)$$

where $\Delta P = P_k - P$; $\chi = \frac{k}{\mu \beta^*}$.

Initial and boundary conditions

$$\Delta P|_{t=0} = \frac{P_k - P_c(0)}{\ln \frac{R_k}{r_c}} \ln \frac{R_k}{r}, \quad r_c \leq r \leq R_k; \quad (2.2)$$

$$\Delta P|_{r=R_k} = 0, \quad t > 0; \quad (2.3)$$

$$\Delta P|_{r=r_c} = P_k - P_c(0), \quad t > 0 \quad (2.4)$$

The solution of equation (2.1) with the initial (2.2) and boundary conditions (2.3) and (2.4) has the form [7,9]

$$\begin{aligned} \Delta P(r, t) = & (P_k - P_c(0)) \left[\frac{\ln\left(\frac{R_k}{r}\right)}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}}{\Delta P_{c1}} - \pi \sum_{i=1}^{\infty} A\left(x_\nu \frac{R_k}{r_c}\right) u\left(x_\nu \frac{r}{r_c}\right) \cdot \exp\left(-\frac{x_\nu^2 \chi t}{r_c^2}\right) \right] - \\ & - \int_0^t \dot{P}_c(\tau) \pi \left[\frac{\ln\left(\frac{R_k}{r}\right)}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}}{\Delta P_{c1}} - \pi \sum_{i=1}^{\infty} A\left(x_\nu \frac{R_k}{r_c}\right) u\left(x_\nu \frac{r}{r_c}\right) \cdot \exp\left(-\frac{x_\nu^2 \chi(t-\tau)}{r_c^2}\right) \right] d\tau \end{aligned} \quad (2.5)$$

Where $\Delta P_{cy} = P_k - P_c(0)$, $P_c(0)$ borehole wall pressure, at the initial moment of time, $\Delta P_{c1} = P_c(0) - P_{c1}$ the differential pressure to which the ΔP_{cy} initial differential is reduced, P_{c1} - pressure on the borehole wall at the bottom of the borehole after pressure change $P_c(0)$.

$$u_\nu\left(\frac{x_\nu r}{r_c}\right) = J_0\left(\frac{x_\nu r}{r_c}\right) Y_0\left(\frac{x_\nu R_k}{r_c}\right) - Y_0\left(\frac{x_\nu r}{r_c}\right) J_0\left(\frac{x_\nu R_k}{r_c}\right)$$

x_ν - roots of the transcendental equation

$$\begin{aligned} J_0\left(\frac{x R_k}{r_c}\right) Y_0(x) - J_0(x) Y_0\left(\frac{x R_k}{r_c}\right) &= 0 \\ A_\nu\left(x_\nu \frac{R_k}{r_c}\right) &= \frac{J_0\left(x_\nu \frac{R_k}{r_c}\right) J_0(x_\nu)}{J_0^2\left(x_\nu \frac{R_k}{r_c}\right) - J_0^2(x_\nu)} \end{aligned} \quad (2.6)$$

Liquid consumption at the moment t through the lateral surface of the borehole radius r_c is determined by the formula

$$Q|_{r=r_c} = -2\pi r_c h \frac{k}{\mu} \frac{\partial \Delta P}{\partial r} \Big|_{r=r_c} \quad (2.7)$$

Then from the expression (2.7) taking into account the formula (2.5), we get

$$\begin{aligned} Q_{A<5A}(t) = & 2\pi h \frac{k}{\mu} (P_k - P_c(0)) \left(\frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \frac{\Delta P_{cy}}{\Delta P_{c1}} - 2B_\nu\left(x_\nu \frac{R_k}{r_c}\right) \cdot \exp(-b_\nu t) \right) - \\ & - 2\pi h \frac{k}{\mu} \int_0^t \dot{P}_c(\tau) \left(\frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \frac{\Delta P_{cy}}{\Delta P_{c1}} - 2B_\nu\left(x_\nu \frac{R_k}{r_c}\right) \exp(-b_\nu(t-\tau)) \right) d\tau. \end{aligned} \quad (2.8)$$

where $B_\nu\left(x_\nu \frac{R_k}{r_c}\right) = \frac{J_0^2\left(x_\nu \frac{R_k}{r_c}\right)}{J_0^2(x_\nu) - J_0^2\left(x_\nu \frac{R_k}{r_c}\right)}$, $b_\nu = \left(\frac{x_\nu^2 \chi}{r_c^2}\right)$

3. Gas movement in the annular space

Now consider the movement of gas in the annular space. The equations of gas motion in annular space and continuity are described by the equations of I.A.Charny [10,11]

$$-\frac{\partial P}{\partial x} = \frac{\partial Q}{\partial t} + 2aQ, \quad -\frac{\partial P}{\partial t} = c^2 \frac{\partial Q}{\partial x}, \quad Q = \rho u \quad (3.1)$$

Differentiating the first equation of the expression (3.1) by coordinate x , and the second in time t and subtract one from the other and we get:

$$\frac{\partial^2 P}{\partial t^2} = c^2 \frac{\partial^2 P}{\partial x^2} - 2a \frac{\partial P}{\partial t} \quad (3.2)$$

Having placed the origin of the coordinate axis at the wellhead and directed it downward, for the initial and boundary conditions we will have:

$$P|_{t=0} = 0, \quad 0 \leq x \leq l; \quad (3.3)$$

$$\left. \frac{\partial P}{\partial t} \right|_{t=0} = 0, \quad 0 \leq x \leq l; \quad (12) \quad P|_{x=0} = P_0(t), \quad t > 0; \quad (3.4)$$

$$P|_{x=l} = P_c(0), \quad t > 0. \quad (3.5)$$

Where $P_0(t)$ - gas injection pressure, $P_c(t)$ - bottom hole pressure, c - speed of sound in gas, a - resistance coefficient, t -time x - coordinate , $Q = \rho u$ - mass flow rate of gas in the flow area of the annular space, ρ - gas density at a given pressure, P - pressure in any cross-section of the annular space.

The solution of equation (3.2), taking into account the boundary conditions (3.4) and (3.5), will be sought in the form [12,13]

$$P = P_0(t) - \frac{P_0(t) - P_c(t)}{l}x + \sum_{i=1}^{\infty} \varphi_i \sin \frac{i\pi x}{l} \quad (3.6)$$

Substituting expression (3.6) into equation (3.2), multiplying both sides of the resulting expression by $\sin \frac{i\pi x}{l}$ and integrating it from 0 to l , we get equation:

$$\begin{aligned} \ddot{\varphi}_i + 2a\dot{\varphi}_i + c^2 \frac{i^2 \pi^2}{l^2} \varphi_i = & -\frac{4a\dot{P}_0(t)}{i\pi} + \frac{4a}{i\pi} (-1)^i \dot{P}_c(t) - \\ & -\ddot{P}_0(t) \frac{2}{i\pi} + \frac{2}{i\pi} (-1)^i \ddot{P}_c(t) \end{aligned} \quad (3.7)$$

Applying the Laplace transform from expression (3.7) we obtain [14,15]

$$\begin{aligned} \overline{\varphi}_i(s) = & \frac{S}{(s+a)^2 + \omega_i^2} \varphi_i(0) + \frac{1}{(s+a)^2 + \omega_i^2} \dot{\varphi}_i(0) + \frac{1}{(s+a)^2 + \omega_i^2} 2a\varphi_i(0) + \\ & + \frac{1}{(s+a)^2 + \omega_i^2} \frac{2}{i\pi} (-1)^i \overline{\ddot{P}}_c + \frac{1}{(s+a)^2 + \omega_i^2} \frac{4a}{i\pi} (-1)^i \overline{\dot{P}}_c - \\ & - \frac{1}{(s+a)^2 + \omega_i^2} \overline{\ddot{P}}_0 \frac{2}{i\pi} - \frac{1}{(s+a)^2 + \omega_i^2} \frac{4a\overline{\dot{P}}_0}{i\pi} \end{aligned} \quad (3.8)$$

$\varphi_i(0)$ and $\dot{\varphi}_i(0)$ are determined from expression (3.6) and have the form

$$\varphi_i(0) = -\frac{2}{\pi} [P_0(0) + P_c(0)], \quad \dot{\varphi}_i(0) = 0$$

where $P_0(0)$ and $P_c(0)$ respectively, the initial value of the gas supply pressure $P_0(t)$ and bottom hole pressure $P_c(t)$.

Applying the Laplace transform from expression (3.6), we obtain

$$\bar{P} = \bar{P}_0(t) - \frac{\bar{P}_0 - \bar{P}_c}{l}x + \sum_{i=1}^{\infty} \bar{\varphi}_i(t) \sin \frac{i\pi x}{l} \quad (3.9)$$

Substituting expression (3.8) into formula (3.9), and the resulting expression into the first equation of system (3.1) after the Laplace transform, we obtain:

$$\bar{Q}_{gas} = \frac{\bar{P}_0}{l(s+2a)} - \frac{\bar{P}_c}{l(s+2a)} + \sum_{i=1}^{\infty} \frac{\bar{\varphi}_i}{(s+2a)} \cos \frac{i\pi x}{l} + \frac{Q_{gas}(0)}{(s+2a)} \quad (3.10)$$

where $Q_{gas}(0)$ - initial mass flow rate of gas.

1. The movement of the gas-liquid mixture in the riser.

The gas supplied through the annular space and the liquid coming from the formation are mixed in the riser string and rises through it. The density of the mixture in this case can be determined by the formula [6]

$$\frac{1+\eta}{\rho_{A<}} = \frac{1}{\rho_3} + \frac{\eta}{\rho_=} , \quad \rho_{A<} = \frac{(1+\eta)\rho_=\rho_3}{\rho_+ + \eta\rho_3}$$

where $\rho_{A<}$, $\rho_=$, ρ_3 - respectively, the density of the mixture, oil and gas at a given pressure, η - mass fraction of oil in gas.

In the first approximation, the mixture is assumed to be homogeneous and the interactions between the liquid and gas bubbles are neglected. Then the equation of motion of the mixture will have the same form as equation (3.2). By placing the origin of the coordinate axis x_1 at the lower end of the pipe string and directing it upward for the initial and boundary conditions, we will have

$$P|_{t=0} = 0, \quad 0 \leq x_1 \leq l \quad (3.11)$$

$$\left. \frac{\partial P}{\partial t} \right|_{t=0} = 0, \quad 0 \leq x \leq l \quad (21) \quad P|_{x=0} = P_0(t), \quad t > 0 \quad (3.12)$$

$$P|_{x_1=l} = P_{CAB}(t), \quad t > 0 \quad (3.13)$$

The solution of equation (3.2), taking into account the boundary conditions (3.12) and (3.13), will be sought in the form [9]

$$P = P_c(t) - \frac{P_c - P_{yct}}{l}x_1 + \sum_{i=1}^{\infty} \varphi_{1i} \sin \frac{i\pi x_1}{l} \quad (3.14)$$

Substituting expression (3.14) into equation (3.2), multiplying both sides of the resulting expression by $\sin \frac{i\pi x_1}{l}$ and integrating it from 0 to l , we will have:

$$\begin{aligned} \ddot{\varphi}_{1i} + 2a\dot{\varphi}_{1i} + c^2 \frac{i^2 \pi^2}{l^2} \varphi_{1i} = & -\frac{4a\dot{P}_c}{i\pi} + \frac{4a}{i\pi} (-1)^i \dot{P}_{yct} - \\ & -\dot{P}_c \frac{2}{i\pi} + \frac{2}{i\pi} (-1)^i \dot{P}_{yct} \end{aligned} \quad (3.15)$$

Applying the Laplace transform from expression (3.14), we obtain

$$\begin{aligned} \overline{\varphi}_{1i}(s) = & \frac{S}{(s+a)^2 + \omega_i^2} \varphi_{1i}(0) + \frac{1}{(s+a)^2 + \omega_i^2} \dot{\varphi}_{1i}(0) + \frac{1}{(s+a)^2 + \omega_i^2} 2a\varphi_{1i}(0) + \\ & + \frac{1}{(s+a)^2 + \omega_i^2} \frac{2}{i\pi} (-1)^i \overline{\dot{P}}_{yct} + \frac{1}{(s+a)^2 + \omega_i^2} \frac{4a}{i\pi} (-1)^i \overline{\dot{P}}_{yct} - \\ & - \frac{1}{(s+a)^2 + \omega_i^2} \overline{\dot{P}}_c \frac{2}{i\pi} - \frac{1}{(s+a)^2 + \omega_i^2} \frac{4a\overline{\dot{P}}_c}{i\pi} \end{aligned} \quad (3.16)$$

$\varphi_{1i}(0)$ and $\dot{\varphi}_{1i}(0)$ are determined from expression (3.14) taking into account the initial conditions (3.11) and (??) and have the form

$$\varphi_{1i}(0) = -\frac{2}{\pi} [P_c(0) + P_{yct}(0)], \quad \dot{\varphi}_{1i}(0) = 0$$

where $c^2 \frac{i^2 \pi^2}{l^2} - a^2 = \omega_i^2$

Applying the Laplace transform from expression (3.14), we obtain

$$\overline{P} = \overline{P}_c(t) - \frac{\overline{P}_c - \overline{P}_{yct}}{l} x_1 + \sum_{i=1}^{\infty} \overline{\varphi}_{1i} \sin \frac{i\pi x_1}{l} \quad (3.17)$$

Substituting formula (3.17) into the first equation, system (3.1) after the Laplace transform, we obtain

$$\overline{Q}_{mix} = \frac{\overline{P}_c}{l(s+2a)} - \frac{\overline{P}_{yct}}{l(s+2a)} - \sum_{i=1}^{\infty} \frac{\overline{\varphi}_{1i}}{(s+2a)} \cdot \frac{i\pi}{l} \cos \frac{i\pi x_1}{l} + \frac{Q_{mix}(0)}{(s+2a)} \quad (3.18)$$

where $Q_{mix}(0)$ - the initial value of the mass flow rate of the mixture.

Continuity conditions

$$f_k Q_{qaz}|_{x=l} + Q_D|_{r=r_c} = f_T Q_{mix}|_{x_1=0} \quad (3.19)$$

where f_T and f_k - respectively, the area of the flow section of the pipe string and the annular section. Applying the Laplace transform from expression (3.19), we obtain

$$f_k \overline{Q}_{qaz}|_{x=l} + \overline{Q}_D|_{r=r_c} = f_T \overline{Q}_{A<}|_{x_1=0} \quad (3.20)$$

Substituting expressions (2.8), (3.10), and (3.18) into the continuity condition (3.20),

taking into account only one term of the series in the first approximation, we obtain

$$\begin{aligned}
\overline{P}_c = & 2\pi h \rho_6 \frac{k}{\mu} \frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}^2}{\Delta P_{c1}} (s+2a)(s+b_\nu)((s+a)^2 + \omega_i^2) \cdot \frac{1}{s\psi(s)} - \\
& - 4\pi h \frac{k}{\mu} \rho_6 B_\nu \left(x_\nu \frac{r_c}{R_k}\right) \cdot \Delta P_{cy} \frac{(s+2a)((s+a)^2 + \omega_i^2)}{\psi(s)} + \\
& + 2\pi h \rho_6 \frac{k}{\mu} P_c(0) \cdot \frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}}{\Delta P_{c1}} (s+2a)(s+b_\nu)((s+a)^2 + \omega_i^2) \cdot \frac{1}{s\psi(s)} - \\
& - 4\pi h \frac{k}{\mu} \rho_6 B_\nu \left(x_\nu \frac{R_k}{r_c}\right) \cdot P_c(0) \frac{(s+2a)((s+a)^2 + \omega_i^2)}{\psi(s)} + \\
& + \frac{f_k}{l} \cdot (s+b_\nu) \cdot ((s+a)^2 + \omega_i^2) \cdot \frac{\overline{P}_0}{s\psi(s)} + \frac{f_k}{l} \cdot i\pi \cdot (s+b_\nu) \frac{1}{\psi(s)} \cdot [s\varphi_i(0) + \dot{\varphi}_i(0) + \\
& + 2a\varphi_i(0) - \frac{2}{\pi}(sP_c(0) + \dot{P}_c(0)) + \frac{4}{\pi}P_c(0) - \frac{2}{\pi}\overline{P}_0 - \frac{4a}{\pi}\overline{P}_0] + \\
& + \frac{f_k Q_q(0)(s+b_\nu)((s+a)^2 + \omega_i^2)}{\psi(s)} + \frac{f_t \overline{P}_{yct}(t)(s+b_\nu)((s+a)^2 + \omega_i^2)}{l \cdot \psi(s)} + \\
& + \frac{f_t \pi (s+b_\nu)}{l \cdot \psi(s)} \cdot [s\varphi_{i1}(0) + \dot{\varphi}_{i1}(0) + 2a\varphi_{i1}(0) - \frac{2}{\pi}\overline{P}_{yct} - \\
& - \frac{4}{i\pi}\overline{P}_{yct} + \frac{2}{\pi}(sP_c(0) + \dot{P}_c(0) + \frac{4a}{\pi}P_c(0))] - \frac{f_t Q_{mix}(0)(s+b_\nu)((s+a)^2 + \omega_i^2)}{\psi(s)}
\end{aligned} \tag{3.21}$$

where

$$\begin{aligned}
\psi(s) = & F(s) \cdot [(s+a)^2 + \omega_i^2] + 2\frac{f_k}{l}(s+b_\nu) + 4a\frac{f_k}{l}(s+b_\nu)s + \\
& + 2\frac{f_t}{l}(s+b_\nu)s^2 + 4a\frac{f_t}{l}(s+b_\nu)s,
\end{aligned}$$

$$\begin{aligned}
F(s) = & 2\pi h \rho_6 \frac{k}{\mu} \frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}}{\Delta P_{c1}} (s+2a)(s+b_\nu) - 4\pi h \frac{k}{\mu} \rho_6 B_\nu \left(x_\nu \frac{R_k}{r_c}\right) \cdot s \cdot (s+2a) + \\
& + \frac{f_k}{l}(s+b_\nu) + \frac{f_t}{l}(s+b_\nu)
\end{aligned}$$

$Q_{A<}(0)$ and $Q_3(0)$ are determined from the following formulas

$$Q_{A<}(0) = Q_3(0) + \frac{\rho_6 Q_D(0)}{2\pi r_c h}, \quad Q_D(0) = 2\pi h \frac{k}{\mu} \frac{P_k - P_c(0)}{\ln\left(\frac{R_k}{r_c}\right)}$$

$$Q_3(0) = \frac{P_0(0) \cdot \exp(g \frac{\rho_{0B}}{0B} l) - P_c(0)}{\exp(g \frac{\rho_{0B}}{0B} l) - 1} \frac{\rho_{0B} g}{2a_{0B}}$$

where ρ_{0B} - gas density at atmospheric pressure; g - acceleration of gravity, P_{0B} - atmospheric pressure; $Q_D(0)$ - oil inflow from the reservoir per unit of time at the initial moment of time.

Applying the inversion and convolution theorems from expression (3.21) taking into account the values $\varphi_i(0)$, $\dot{\varphi}_i(0)$, $\varphi_{1i}(0)$ and $\dot{\varphi}_{1i}(0)$ for the following values of the system parameters:

$$r_T = 3 \cdot 10^{-2} <; a = 10^{-1} c^{-1}; \mu = 10^{-3} Pa \cdot A; h = 10 <; k = 10^{-13} <^2; \rho_6 = 4 \cdot 10^2 : 3 / <^3;$$

$$l = 2000 <; \chi = 0.17 \frac{m^2}{c}; P_c(0) = 1, 2 \cdot 10^7 0; P_0 = 11 \cdot 10^6 0; P_{ycm}(0) = 1 \cdot 10^6 0;$$

$$P_k = 1, 4 \cdot 10^7 0; P_{0B} < = 10^5 0; R_k = 100 <; \pi = 3, 14; C = 1000 < / c; g = 10 m / c^2$$

$$r_c = 7.5 \cdot 10^{-2} <, B(x_\nu) = 0.114; b_\nu = 0, 0002048; Q_3(0) = 1407, 724120 : 3 / A5 ;;$$

$$Q_{A<}(0) = 1407, 72571; Q_D(0) = 0, 00159217410.$$

From expression (3.21), taking into account the above numerical values of the parameters, we obtain

$$\begin{aligned}
P_c(t) = & 8,094995281 - 0,02636096437 \exp(-0,0002045376007t) + \\
& + 8,294617222 \cdot 10^{-90} \cdot (-4,515918736 \cdot 10^{88} \cos(0,9071083878t)) + \\
& + 1,157214796 \cdot 10^{10} \sin(0,9071083878t) \cdot \exp(-0,03764469709t) + \\
& + 157,818244 \cdot \exp(-29,69372812t)
\end{aligned} \tag{3.22}$$

Now let us determine $Q_{A<}(t)$ from expression (3.18) taking into account expressions (3.16) and (3.17) we obtain.

$$\begin{aligned}
\overline{Q}_{mix} = & \frac{1}{l(s+2a)} \left[2\pi h \rho_6 \frac{k}{\mu} \frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}^2}{\Delta P_{c1}} (s+2a)(s+b_\nu)((s+a)^2 + \omega_i^2) \cdot \frac{1}{s\psi(s)} - \right. \\
& - 4\pi h \frac{k}{\mu} \rho_6 B_\nu \left(x_\nu \frac{r_c}{R_k}\right) \cdot \Delta P_{cy} \frac{(s+2a)((s+a)^2 + \omega_i^2)}{\psi(s)} + \\
& + 2\pi h \rho_6 \frac{k}{\mu} P_c(0) \cdot \frac{1}{\ln\left(\frac{R_k}{r_c}\right)} \cdot \frac{\Delta P_{cy}}{\Delta P_{c1}} (s+2a)(s+b_\nu)((s+a)^2 + \omega_i^2) \cdot \frac{1}{s\psi(s)} - \\
& - 4\pi h \frac{k}{\mu} \rho_6 B_\nu \left(x_\nu \frac{R_k}{r_c}\right) \cdot P_c(0) \frac{(s+2a)((s+a)^2 + \omega_i^2)}{\psi(s)} + \\
& + \frac{f_k}{l} \cdot (s+b_\nu) \cdot ((s+a)^2 + \omega_i^2) \cdot \frac{\overline{P}_0}{s\psi(s)} + \frac{f_k}{l} \cdot i\pi \cdot (s+b_\nu) \frac{1}{\psi(s)} \cdot [s\varphi_i(0) + \dot{\varphi}_i(0) + \\
& + 2a\varphi_i(0) - \frac{2}{\pi}(sP_c(0) + \dot{P}_c(0)) + \frac{4}{\pi}P_c(0) - \frac{2}{\pi}\overline{\overline{P}}_0 - \frac{4a}{\pi}\overline{\overline{P}}_0] + \\
& + \frac{f_k Q_q(0)(s+b_\nu)((s+a)^2 + \omega_i^2)}{\psi(s)} + \frac{f_l \overline{P}_{yct}(t)(s+b_\nu)((s+a)^2 + \omega_i^2)}{l \cdot \psi(s)} + \\
& + \frac{f_l \pi (s+b_\nu)}{l \cdot \psi(s)} \cdot [s\varphi_{1i}(0) + \dot{\varphi}_{1i}(0) + 2a\varphi_{1i}(0) - \frac{2}{\pi}\overline{\overline{P}}_{yct} - \\
& - \frac{4}{i\pi}\overline{\overline{P}}_{yct} + \frac{2}{\pi}(sP_c(0) + \dot{P}_c(0) + \frac{4a}{\pi}P_c(0))] - \frac{f_l Q_{mix}(0)(s+b_\nu)((s+a)^2 + \omega_i^2)}{\psi(s)} \Big] \\
& - \frac{\overline{P}_{yct}(t)}{l(s+2a)} + \frac{i\pi \overline{\varphi}_{1i}(t)}{(s+2a)} + \frac{Q_{mix}(0)}{(s+2a)}
\end{aligned} \tag{3.23}$$

Applying the inversion and convolution theorems from expression (3.23), taking into account the above numerical values of the parameters, we obtain an expression for determining the change in oil consumption Q_{mix} as a function of time t.

$$\begin{aligned}
Q_{mix} = & 1407,526057 - 4,930715315 \cdot 10^{-9} \exp(-0,0002045376007t) + \\
& + 1,197475525 \cdot 10^{-146} (-2,64107153 \cdot 10^{138} \cos(0,9071083878t)) - \\
& - 9,77294414 \cdot 10^{138} \sin(0,9071083878t) \cdot \exp(-0,03764469709t) - \\
& - 9,926945943 \cdot 10^{-10} \cdot \exp(-29,69372812t) + 0,3311322966 \cdot \exp(-0,0200t) - \\
& - 1,689332117 \cdot 10^{-112} (1,131353126 \cdot 10^{110} \cos(1,569968153t)) + \\
& + 2,109377571 \cdot 10^{110} \cdot \sin((1,569968153t)) \cdot \exp(-0,0100t)
\end{aligned} \tag{3.24}$$

The results of calculations using formulas (3.22) and (3.24) are shown in Fig. 1, Fig. 2, Fig. 3 and Fig. four.

As can be seen from Fig. 1 (for small values of time) and Fig. 2 (for large values of time), the pressure $P_c(t)$ at the bottom of the well during the transition from one mode to another first pulsates, and then after some time, stabilizing, it approaches its stationary value.

From Fig. 3 and Fig. 4, it can be seen that at constant pressure $P_{yc}(t)$ values at the wellhead, when switching to another mode of the well section, it pulsates per unit of time and stabilizes after a while.

4. Conclusion

A hydrodynamic model of unsteady movement of oil and gas in the reservoir- system has been built and analytical expressions have been obtained that allow, depending on the parameters of the reservoir-well system, to determine the bottomhole pressure and well productivity.

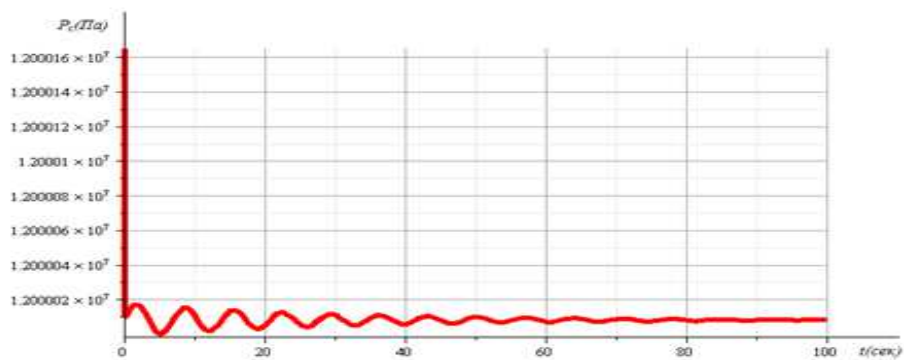


Fig. 1 . Graph of pressure $P_c(t)$ at the bottom for small values of time



Fig. 2 Graph of pressure $P_c(t)$ at the bottom for large values of time

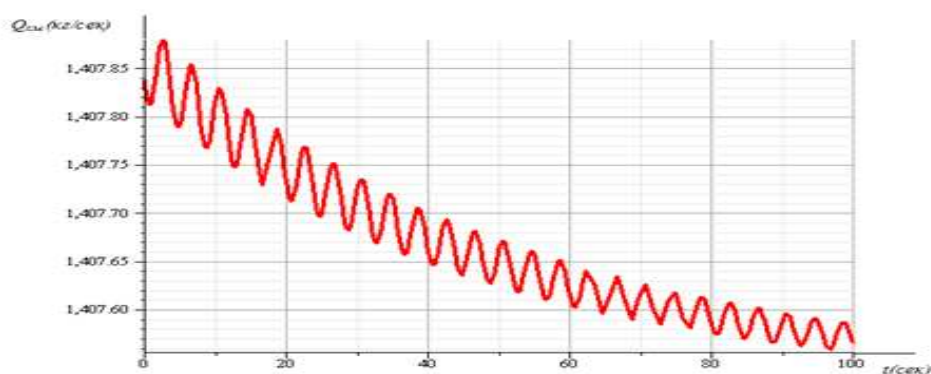


Fig. 3. Graph of determining the change in oil consumption at small values of time

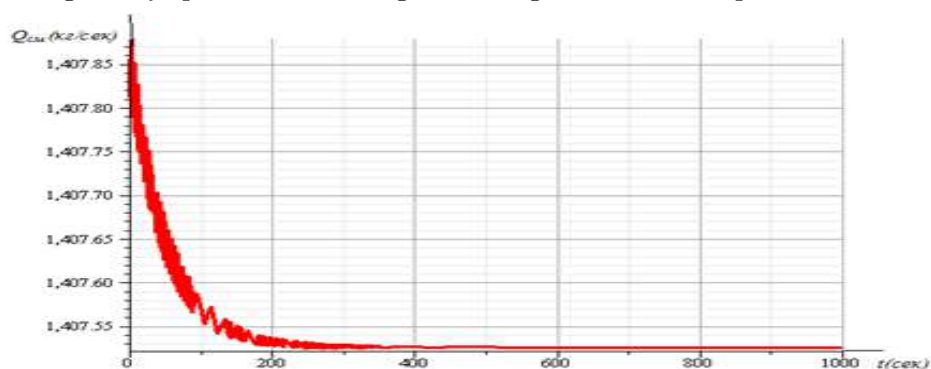


Fig. 4. Graph of determining the change in oil consumption at large values of time

References

- [1] Barashkin R.L., Samarin I.V. "Hydrodynamic modeling of the production process of gas-lift wells" // Bulletin of the Tomsk Polytechnic University. 2006. V.309. № 6
- [2] Duc Hien Bui, Rais Yanfurovich Nugaev, Rim Khalitovich Khazipov "On the issue of optimizing the operating modes of gas-lift wells" // Scientific and technical journal "Problems of collection, preparation and transportation of oil and oil products." 2012 №1
- [3] Kashif Rashid, William Bailey, Benoit Couet "A Survey of Methods for Gas- Lift Optimization" // Modelling and Simulation in Engineering, september, 2012.
- [4] Aliev F.A., Ilyasov M.Kh, Dzhamalbekov M.A. "Modeling the operation of a gas-lift well" // "OilGasScientificResearchProject" Institute, SOCAR, 2008.
- [5] Aliev F.A., Aliev N.A., Guliev A.P., Tagiev R.M., Dzhamalbekov M.A. "Method for solving a boundary value problem for a system of hyperbolic equations describing motion in a gas-lift process" // Applied Mathematics and Mechanics. 2018.V 82 issue 4.P. 512-518

- [6] Abbasov E.M. Determination of fluid accumulation time in periodic gas-lift wells. Engineering Physics Journal 2013, V86, №2, P.310-317
- [7] Shchelkachev V.N. Foundations and applications of the theory of transient filtration. V 24.M.: Oil and gas, 1995, 585 P.
- [8] Charny A.I. Underground fluid dynamics. Moscow: Gostommehizdat, 1963.
- [9] Agaeva N.A. "Hydrodynamics of fluid movement in the conjugate system reservoir-well-pipeline" // Engineering Physics Journal, Volume 94, № 1, 2021, P.62-71
- [10] Charny A.I. Unsteady fluid movement in pipes. Moscow: Bowels, 1975.
- [11] Huseynzade M.A., Druchina L.I., Petrova O.N., Stepanova M.F. Hydrodynamic processes in complex pipeline systems. Moscow: Bowels, 1991.
- [12] Abbasov E.M., Kengerli T.S., Abdullaeva N.R. Modeling the process of filtration of a gas-liquid mixture in a conjugated system of plastisin. Engineering Physics Journal.2020, V.92, No 5, P.1122-1196
- [13] Abbasov E.M., Kerimova Sh.A., Agaeva N.A. Integral modeling of the pressure recovery process. Engineering Physics Journal, 2019, V.92, №6, P.2475- 2481
- [14] Aramonovich I.G., Lunts G.L., Elsgolts E.E. Complex variable functions. Operational calculus. Stability theory. M.: Science, 1968, 390P.
- [15] Dec. D Guide to the practical application of the Laplace transform. M.: Science,1965.

Sh.A.Kerimova

Institute of Mathematics and Mechanics of the National Academy of Sciences of Azerbaijan, Baku, AZ1141, Azerbaijan

E-mail: shusha_az@rambler.ru

Received 12 March 2021

Accepted 19 July 2021